




TECHNOPOWER

TP1350

POWERED BY PERKINS
4012-46TAG1A

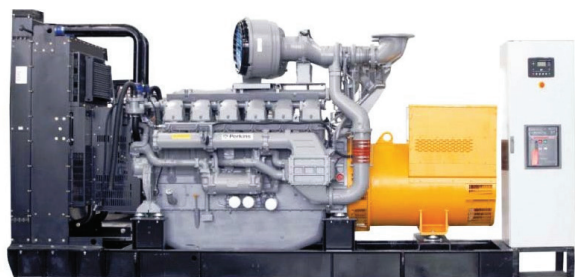

Genset Model	TP1350
Engine Model	4012-46TAG1A
Alternator Model	LSA 50.2L7
Controller Model	Deep Sea 4520 MKII

OUTPUT RATINGS		50Hz		60Hz	
		PRIME	STANDBY	PRIME	STANDBY
KVA POWER	KVA	1364	1500	1369	1505
KW POWER	KW	1081	1200	1095	1204
RATED SPEED	r.p.m	1500		1800	
VOLTAGE	V	230/400		110/220	
		240/415		220/380	

PRIME RATINGS







These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercial purchased power. There is no limitation to the annual hours of operation and this model can supply 10% Overload power for 1hour in 12 hours operation.

STANDBY RATINGS

These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings.



ENGINE SPECIFICATIONS

-  Three Phase
-  Diesel
-  Water Cooled
-  50/60Hz
-  40 Amps Battery Charging Alternator
-  24V Negative

Manufacturer	PERKINS
Model	4012-46TAG1A
Engine Type	4-stroke
Aspiration Type	Turbocharged air to air charge cooled
Bore and Stroke	160 x 190 mm
Cooling System	Water Cooled
Number of cylinders and arrangement	12/60° Vee Form
Compression Ratio	13.6 : 1
Circuit Breaker Type	3 Pole ACB
Displacement	45.842 L





TECHNOPOWER

TP1350
 POWERED BY PERKINS
 4012-46TAG1A



ALTERNATOR SPECIFICATIONS

Manufacturer	Leroy Somer	Over speed (rpm)	2250
Model	LSA 50.2 L7	Voltage Regulation(steady state)	+/- 0.5%
No of Bearings	1	Wave from NEMA=TIF	50
Insulation Class	H	Wave From IEC=THF	2.0%
Wires	6(12)	Total Harmonic Content LL/NN	3.5%
Ingress Protection Rating	IP23	Radio Interference	Supression is in line with European Standard EN61000-6
Excitation System	AREP/PMG	Radiant Heat kW	50Hz 53.8
AVR Model	D350		60Hz 67.8

■ IP23 Protection


■ H Class Insulation

■ AREP/PMG Excitation System

WEIGHT AND DIMENSIONS



		OPEN	CLOSE
LENGTH	cm	495	1200
WIDTH	cm	205	238
HEIGHT	cm	270	260
WEIGHT	kg	9800	11400

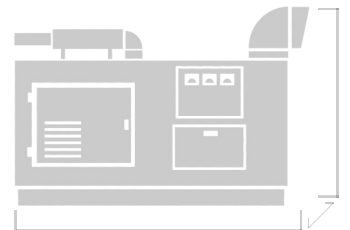




TECHNOPOWER

TP1350

POWERED BY PERKINS
4012-46TAG1A

Fuel Filter Type	Replaceable Element
Recommended Fuel	Class A2 Diesel

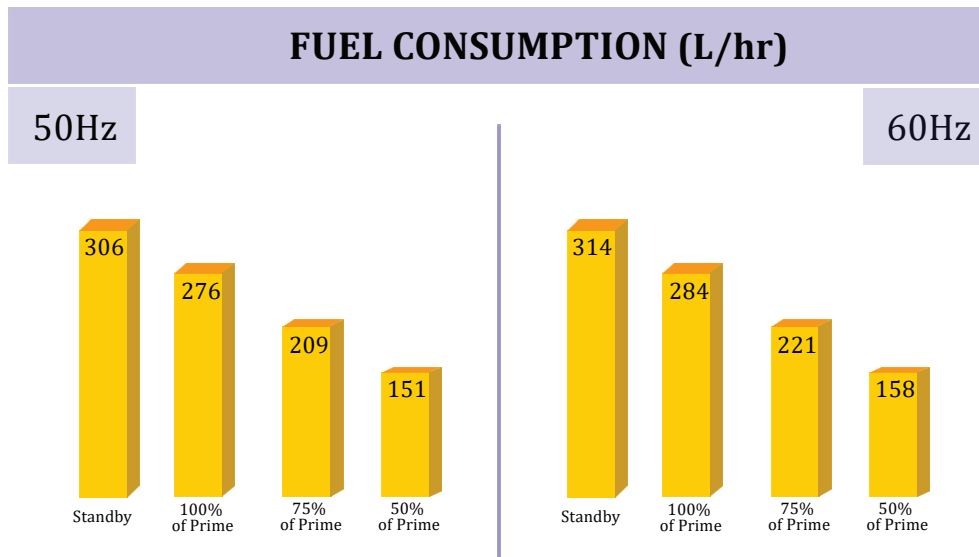

FUEL SYSTEM

		50Hz		60Hz			
EXHAUST	SILENCER TYPE	INDUSTRIAL					
	MAX. ALLOWABLE BACK PRESSURE	kPa(in Hg)		5.0(1.5)	5.0(1.5)		
	SILENCER NOISE REDUCTION LEVEL			10dB	10dB		
		PRIME	STANDBY	PRIME	STANDBY		
	EXHAUST GAS FLOW	m ³ /min(cfm)		280(9888)	280(9888)	250(8288)	287(10135)
	EXHAUST GAS TEMPERATURE	°C (°F)		425(797)	425(797)	389(732.2)	403(757.4)

EXHAUST SYSTEM





TECHNOPOWER

TP1350

POWERED BY PERKINS
4012-46TAG1A

A I R

AIR FILTER TYPE		Medium duty axial flow			
		50Hz		60Hz	
		PRIME	STANDBY	PRIME	STANDBY
COMBUSTION AIR FLOW	m ³ /min(cfm)	112(3955)	120(3238)	117(4132)	124(4379)
MAX. COMBUSTION AIR INTAKE RESTRICTION	kPa(in H ₂ O)	2.0 (8.0)		2.0 (8.0)	

AIR SYSTEM

LUBRICATION SYSTEM

Oil Filter Type	Spin-on , Full Flow	
Total Oil Capacity	L(US gal)	177 (46.8)
Oil Pan	L(US gal)	157.5 (41.6)
Oil Type	CH4 15W-40	

COOLING SYSTEM

		50Hz	60Hz
Water Pump Type	Centrifugal		
Cooling System Capacity	L	207(54.6)	207(54.6)
Radiator Fan Load	kW(hp)	42.0(56.3)	60.0(80.5)
Radiator Cooling Airflow	m ³ /min(cfm)	1212	1608
External Restriction to Cooling Airflow	Pa(in H ₂ O)	250(1.0)	250(1.0)





TECHNO POWER

Authorized
Distributor
in UAE



DSE4520 MKII

AUTO START AND AUTO MAINS FAILURE CONTROL MODULES

(ALTERNATOR FREQUENCY & CAN SPEED SENSING)

DSE4520 MKII



KEY FEATURES

- Auto Start and AMF mode in one module (DSE4520 MKII only)
- J1939-75 support and CAN alarm ignore function
- Alternator frequency & CAN speed sensing in one variant
- Largest back-lit icon display in its class (configurable as text display)
- Heated display option
- Real time clock provides accurate event logging
- Fully configurable via the fascia or PC using USB communication
- Extremely efficient power save mode
- 3 phase generator sensing
- 3 phase mains (utility) sensing (DSE4520 MKII only)
- Compatible with 600 V ph to ph nominal systems
- Generator/load power monitoring (kW, kV A, kV Ar, pf)
- Accumulated power monitoring (kW h, kVA h, kVAR h)
- Generator overload protection (kW)
- Generator/load current monitoring and protection
- Fuel and start outputs (configurable when using CAN)
- 4 configurable DC outputs
- 5 V output
- Configurable fuel & crank outputs
- 3 configurable analogue/digital inputs

- 4 configurable digital inputs
- Configurable staged loading outputs
- 3 engine maintenance alarms
- Engine speed protection
- Engine hours counter
- Engine pre-heat
- Engine run-time scheduler
- Engine idle control for starting & stopping
- Tier 4 engine instrumentation screens
- Battery voltage monitoring
- Start on low battery voltage
- Configurable remote start input
- 1 alternative configuration
- Comprehensive warning, electrical trip or shutdown protection upon fault condition
- LCD alarm indication
- Coolant temperature pre-alarm
- Event log (50)
- Fuel solenoid pulling circuit
- On-screen line diagram on/off functionality
- Configurable CAN instrumentation (10)
- Water in fuel digital input
- Tank bund alarm digital input
- Generator at rest output
- ECU periodic wake-up for information retrieval
- Back-light power-save mode
- Adjustable delay crank timer
- Pre/post heat functionality

- Overload protection
- Mains/generator A/C system selection
- Output timer for external audible alarm
- Accommodates a wide range of senders and temperatures

KEY BENEFITS

- Ultimate size to feature ratio
- Automatically transfers between mains (utility) and generator (DSE4520 MKII only)
- Hours counter provides accurate information for monitoring and maintenance periods
- User-friendly set-up and button layout for ease of use
- Multiple parameters are monitored simultaneously which are clearly displayed on the largest back-lit icon display in its class
- The module can be configured to suit a wide range of applications
- Uses DSE Configuration Suite PC Software for simplified configuration
- Compatible with a wide range of CAN engines including Tier 4
- Licence-free PC software
- IP65 rating (with optional gasket) offers increased resistance to water ingress

SPECIFICATIONS

DC SUPPLY

CONTINUOUS VOLTAGE RATING
8 V to 35 V Continuous

CRANKING DROPOUTS

Able to survive 0 V for 50 mS, providing supply was at least 10 V before dropout and supply recovers to 5 V. This is achieved without the need for internal batteries. LEDs and backlight will not be maintained during cranking.

MAXIMUM OPERATING CURRENT

85 mA at 12 V, 96 mA at 24 V

MAXIMUM STANDBY CURRENT

51 mA at 12 V, 47 mA at 24 V

MAXIMUM SLEEP CURRENT

35 mA at 12 V, 32 mA at 24 V

MAXIMUM DEEP SLEEP CURRENT

<10 uA at 12 V, <10 uA at 24 V

MAINS (UTILITY) DSE4520 MKII ONLY

VOLTAGE RANGE
15 V to 415 V AC (Ph to N)
26 V to 719 V AC (Ph to Ph)

FREQUENCY RANGE

3.5 Hz to 75 Hz

OUTPUTS

OUTPUT A (FUEL)

10 A short term, 5 A continuous, at supply voltage

OUTPUT B (START)

10 A short term, 5 A continuous, at supply voltage

AUXILIARY OUTPUTS C, D, E & F

2 A DC at supply voltage

GENERATOR

VOLTAGE RANGE

15 V to 415 V AC (Ph to N)
26 V to 719 V AC (Ph to Ph)

FREQUENCY RANGE

3.5 Hz to 75 Hz

DIMENSIONS

OVERALL

140 mm x 113 mm x 43 mm
5.5" x 4.4" x 1.7"

PANEL CUT-OUT

118 mm x 92 mm
4.6" x 3.6"

MAXIMUM PANEL THICKNESS

8 mm
0.3"

STORAGE TEMPERATURE RANGE

-40 °C to +85 °C
-40 °F to +185 °F

OPERATING TEMPERATURE RANGE

-30 °C to +70 °C
-22 °F to +158 °F

-40 °C to +70 °C (for heated display variant)
-40 °F to +158 °F (for heated display variant)



TECHNOPOWER GENERATORS SHARJAH INDUSTRIAL AREA2, BADR AL SAYEGH BLDG SHOP NO:1,2,3,4,5, SHARJAH, UAE

Call: +971 6 557 9794, +971 6 532 9794, Fax: +971 6557 9792, Website: www.technopowergroup.com, Email: sales@technopowergroup.com

