




# TECHNOPOWER

TP 13  
POWERED BY PERKINS  
403A-15G1

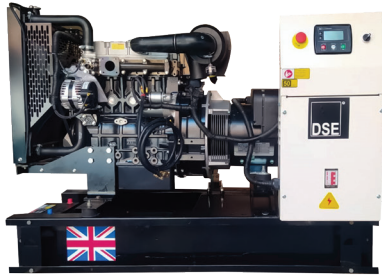

Genset Model	TP 13
Engine Model	403A - 15G1
Alternator Model	TAL040C
Controller Model	Deep Sea 4520 MKII

### PRIME RATINGS

These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercial purchased power. There is no limitation to the annual hours of operation and this model can supply 10% Overload power for 1hour in 12 hours operation.







### STANDBY RATINGS

These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings.

OUTPUT RATINGS		50 Hz	
		PRIME	STANDBY
KVA POWER	KVA	13.0	15.0
KW POWER	KW	10.4	11.4
RATED SPEED	r.p.m	1500	
VOLTAGE	V	230/400	240/415



## ENGINE SPECIFICATIONS

-  Three Phase
-  Diesel
-  Water Cooled
-  50 Hz
-  15 Amps Battery Charging Alternator
-  12V Negative

Manufacturer	PERKINS
Model	403A -15G1
Engine Type	4-stroke
Aspiration Type	Naturally Aspirated
Bore and Stroke	84 x 90 mm
Cooling System	Water Cooled
Number of cylinders and arrangement	3/ Vertical in Line
Compression Ratio	22.5 : 1
Circuit Breaker Type	3 Pole MCB/ MCCB
Displacement	1.496 L





# TECHNOPOWER

## TP 13

POWERED BY PERKINS  
403A-15G1



### ALTERNATOR SPECIFICATIONS

Manufacturer	Leroy Somer	Over speed (rpm)	2250
Model	TAL040C	Voltage Regulation(steady state)	+/- 1.0%
No of Bearings	1	Wave from NEMA=TIF	50
Insulation Class	H	Wave From IEC=THF	2.0%
Wires	6	Total Harmonic Content LL/NN	3.5%
Ingress Protection Rating	IP23	Radiant Heat kW	2.1
Excitation System	SHUNT	Radio Interference	Suppression is in line with European Standard EN61000-6
AVR Model	R120		

IP23 Protection


H Class Insulation

SHUNT Excitation System

### WEIGHT AND DIMENSIONS



		OPEN	CLOSE
LENGTH	mm	1510	1800
WIDTH	mm	630	920
HEIGHT	mm	1100	1302
WEIGHT	kg	400	480

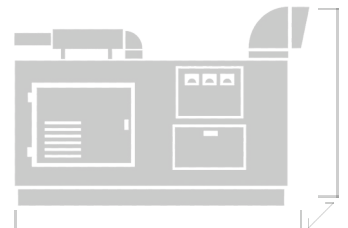



# TECHNOPOWER


## TP 13

POWERED BY PERKINS  
403A-15G1

Fuel Filter Type	Replaceable Element
Recommended Fuel	Class A2 Diesel
Fuel Tank Capacity	78.2L

### FUEL CONSUMPTION (L/hr)

50Hz

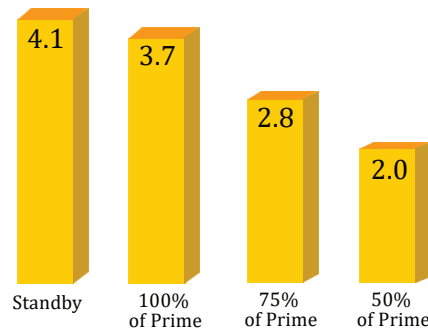

FUEL SYSTEM

		50Hz	
		PRIME	STANDBY
EXHAUST	SILENCER TYPE	INDUSTRIAL	
	MAX. ALLOWBACK PRESSURE	10.2(3.0)	
	SILENCER NOISE REDUCTION LEVEL	30 dB	
	EXHAUST GAS FLOW	2.7(95)	2.9(102)
	EXHAUST GAS TEMPERATURE	445(833)	490(914)
		m <sup>3</sup> /min(cfm)	
	kPa(in Hg)		
	°C (°F)		

EXHAUST SYSTEM





# TECHNOPOWER

## TP 13

POWERED BY PERKINS  
403A-15G1

AIR SYSTEM

A I R	AIR FILTER TYPE	Replaceable Element (50Hz)	
		PRIME	STANDBY
	COMBUSTION AIR FLOW $m^3/min(cfm)$	1.1(38)	1.1(38)
	MAX. COMBUSTION AIR INTAKE RESTRICTION $kPa(in H_2O)$	3(12.1)	

## LUBRICATION SYSTEM

Oil Filter Type	Spin-on , Full Flow	
Total Oil Capacity	L(US gal)	6.0 (1.6)
Oil Pan	L(US gal)	4.5 (1.2)
Oil Type	CH4 15W-40	

## COOLING SYSTEM

50Hz

Water Pump Type	Centrifugal	
Cooling System Capacity	L	6
Radiator Fan Load	kW(hp)	0.2(0.2)
Radiator Cooling Airflow	$m^3/min(cfm)$	28.8(1017)
External Restriction to Cooling Airflow	Pa(in H <sub>2</sub> O)	125(0.5)





# TECHNO POWER

Authorized  
**Distributor**  
in UAE



## DSE4520 MKII AUTO START AND AUTO MAINS FAILURE CONTROL MODULES (ALTERNATOR FREQUENCY & CAN SPEED SENSING)

DSE4520 MKII



### KEY FEATURES

- Auto Start and AMF mode in one module (DSE4520 MKII only)
- J1939-75 support and CAN alarm ignore function
- Alternator frequency & CAN speed sensing in one variant
- Largest back-lit icon display in its class (configurable as text display)
- Heated display option
- Real time clock provides accurate event logging
- Fully configurable via the fascia or PC using USB communication
- Extremely efficient power save mode
- 3 phase generator sensing
- 3 phase mains (utility) sensing (DSE4520 MKII only)
- Compatible with 600 V ph to ph nominal systems
- Generator/load power monitoring (kW, kV A, kV Ar, pf)
- Accumulated power monitoring (kW h, kVA h, kVAR h)
- Generator overload protection (kW)
- Generator/load current monitoring and protection
- Fuel and start outputs (configurable when using CAN)
- 4 configurable DC outputs
- 5 V output
- Configurable fuel & crank outputs
- 3 configurable analogue/digital inputs

- 4 configurable digital inputs
- Configurable staged loading outputs
- 3 engine maintenance alarms
- Engine speed protection
- Engine hours counter
- Engine pre-heat
- Engine run-time scheduler
- Engine idle control for starting & stopping
- Tier 4 engine instrumentation screens
- Battery voltage monitoring
- Start on low battery voltage
- Configurable remote start input
- 1 alternative configuration
- Comprehensive warning, electrical trip or shutdown protection upon fault condition
- LCD alarm indication
- Coolant temperature pre-alarm
- Event log (50)
- Fuel solenoid pulling circuit
- On-screen line diagram on/off functionality
- Configurable CAN instrumentation (10)
- Water in fuel digital input
- Tank bund alarm digital input
- Generator at rest output
- ECU periodic wake-up for information retrieval
- Back-light power-save mode
- Adjustable delay crank timer
- Pre/post heat functionality

- Overload protection
- Mains/generator A/C system selection
- Output timer for external audible alarm
- Accommodates a wide range of senders and temperatures

### KEY BENEFITS

- Ultimate size to feature ratio
- Automatically transfers between mains (utility) and generator (DSE4520 MKII only)
- Hours counter provides accurate information for monitoring and maintenance periods
- User-friendly set-up and button layout for ease of use
- Multiple parameters are monitored simultaneously which are clearly displayed on the largest back-lit icon display in its class
- The module can be configured to suit a wide range of applications
- Uses DSE Configuration Suite PC Software for simplified configuration
- Compatible with a wide range of CAN engines including Tier 4
- Licence-free PC software
- IP65 rating (with optional gasket) offers increased resistance to water ingress

### SPECIFICATIONS

#### DC SUPPLY

**CONTINUOUS VOLTAGE RATING**  
8 V to 35 V Continuous

#### CRANKING DROPOUTS

Able to survive 0 V for 50 ms, providing supply was at least 10 V before dropout and supply recovers to 5 V. This is achieved without the need for internal batteries. LEDs and backlight will not be maintained during cranking.

#### MAXIMUM OPERATING CURRENT

85 mA at 12 V, 96 mA at 24 V

#### MAXIMUM STANDBY CURRENT

51 mA at 12 V, 47 mA at 24 V

#### MAXIMUM SLEEP CURRENT

35 mA at 12 V, 32 mA at 24 V

#### MAXIMUM DEEP SLEEP CURRENT

<10 uA at 12 V, <10 uA at 24 V

#### MAINS (UTILITY) DSE4520 MKII ONLY VOLTAGE RANGE

15 V to 415 V AC (Ph to N)  
26 V to 719 V AC (Ph to Ph)

#### FREQUENCY RANGE

3.5 Hz to 75 Hz

#### OUTPUTS

##### OUTPUT A (FUEL)

10 A short term, 5 A continuous, at supply voltage

##### OUTPUT B (START)

10 A short term, 5 A continuous, at supply voltage

#### AUXILIARY OUTPUTS C, D, E & F

2 A DC at supply voltage

#### GENERATOR

##### VOLTAGE RANGE

15 V to 415 V AC (Ph to N)  
26 V to 719 V AC (Ph to Ph)

##### FREQUENCY RANGE

3.5 Hz to 75 Hz

#### DIMENSIONS

##### OVERALL

140 mm x 113 mm x 43 mm  
5.5" x 4.4" x 1.7"

##### PANEL CUT-OUT

118 mm x 92 mm  
4.6" x 3.6"

##### MAXIMUM PANEL THICKNESS

8 mm  
0.3"

##### STORAGE TEMPERATURE RANGE

-30 °C to +85 °C  
-40 °F to +185 °F

##### OPERATING TEMPERATURE RANGE

-40 °C to +70 °C  
-22 °F to +158 °F

-40 °C to +70 °C (for heated display variant)  
-40 °F to +158 °F (for heated display variant)



TECHNOPOWER GENERATORS SHARJAH INDUSTRIAL AREA2, BADR AL SAYEGH BLDG SHOP NO:1,2,3,4,5, SHARJAH, UAE

Call: +971 6 557 9794, +971 6 532 9794, Fax: +971 6557 9792, Website: [www.technopowergroup.com](http://www.technopowergroup.com), Email: [sales@technopowergroup.com](mailto:sales@technopowergroup.com)





# TECHNOPOWER Silent Canopy




Fuel Inlet/Outlet



Document holder  
Protects documents



Diesel filling with  
key lock



Fuel/water  
separator filter

**Engines** Selected from the heavy duty product and optimized for low quality fuel

**Alternator** 3phase and Single-Phase with AVR(+/-1%)

**Sound proof galvanized canopy** 65dB(A) @7m

**Lockable Snap handles**

**Integrated fuel tank made of Polypropylene** with bounded base for 8hrs. @ full load

**Reinforced anti-rollover forklift tunnels** For safe handling

**Central lifting hook** for easy lifting

**Control panel**  
IP55 Control panel managed by DSE 4520 MKII Controllers




**Easy to service**



**Galvanized metal sheet** to increase strength and durability



**Exhaust terminal pipe** with tilting cap rain over



**Exhaust pipes** with exhaust heat wrap for high-performance and security



**Emergency stop button** It shuts down the generating set immediately



**Anti-vibration pads** attenuate the vibrations caused by the unit



**Oil and Coolant Drain**